
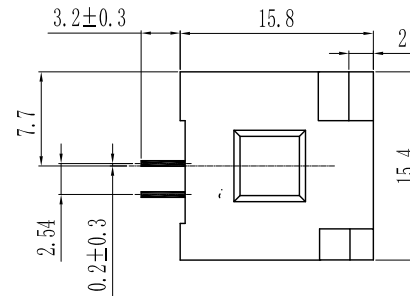
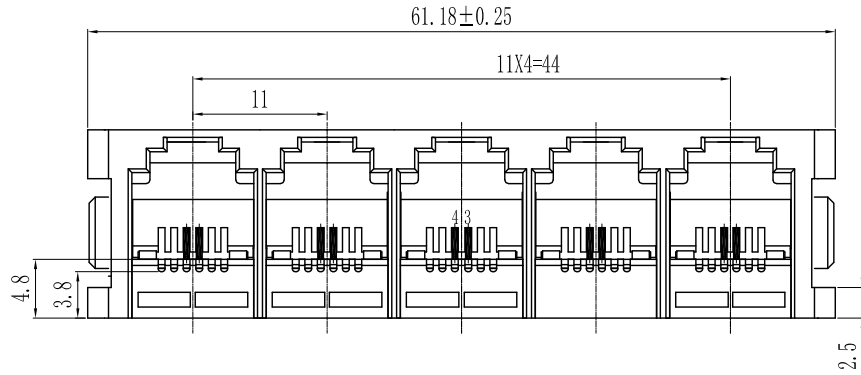
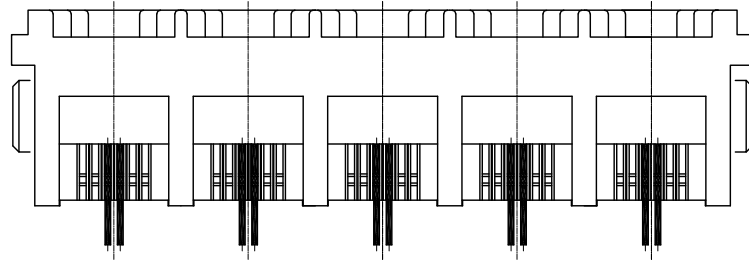


RoHS compliant

PC Board Layout

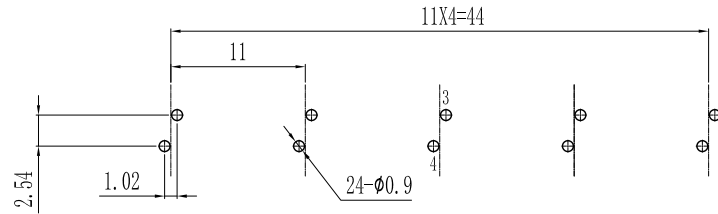

NOTES:

- HOUSING MATERIAL: GLASS FILLED POLYESTER UL94V-0.
 - CONTACT MATERIAL: PHOSPHOR BRONZE $\phi 0.46\text{mm}$.
 - PLATING: GOLD PLATING $\text{Fu} \sim 50\mu$ OVER NICKEL.
- ELECTRICAL:
- VOLTAGE RATING: 125 VAC RMS.
 - CURRENT RATING: 1.5 AMP.
 - CONTACT RESISTANCE: 30 MILLIOHMS MAX.
 - INSULATION RESISTANCE: 500 MEGOHMS MIN @ 500V DC.
 - DIELECTRIC WITHSTANDING RISTANCE: 1000VAC RMS 60Hz 1MIN.
- MECHANICAL:
- DURABILITY : 750 CYCLES MIN.
 - PCB RETENTION PRE-SOLDER
- ENVIRONMENTAL:
- STORAGE: -40°C TO $+85^{\circ}\text{C}$.
 - OPERATION: 0°C TO 70°C .

TOLERANCE UNLESS OTHERWISE SPEC												品名 Classification		5225 1X5 6P2C 180° 无铁脚	
BASIC DIMENSION	TOLERANCE											料号 Material No			
.X	± 0.5											数量 QTY		重量 Weight	
.XX	± 0.35											比例 SCALE		尺寸 SIZE	
.XXX	± 0.25	标记 Mark	处数 Number of places	文件号 Doc.No.	签名 Sign	日期 Date					1:1		A4		单位 UNIT
ANGLES	$\pm 0.5^{\circ}$	设计 Designed	罗锡强			标准化 Standardize					共 1 张		第 1 张		
		校对 Proofread			审核 Check	隆应勇						Coorle Technology			
		工艺 Technology			批准 APPROVED	隆建红									