

REVISION RECORD				
REV	ECD	DESCRIPTION	DRFT	CHKD

H  
G  
F  
E  
D  
C  
B  
A

NOTES:

MATERIAL :

- 1.HOUSING MATERIAL :GLASS FILLED POLYESTER UL94V-0.
- 2.CONTACT MATERIAL :PHOSPHOR BRONZE  $\phi 0.45\text{mm}$ .
- 3.PLATING :GOLD PLATING OVER NICKEL.

ELECTRICAL:

- 1.VOLTAGE RATING :125 VAC RMS.
- 2.CURRENT RATING :15 AMP.
- 3.CONTACT RESISTANCE :30 MILLIOHMS MAX.
- 4.INSULATION RESISTANCE :500 MEGOHMS MIN @ 500V DC .
- 5.DIELECTRIC WITHSTANDING RESISTANCE :1000V AC RMS 50Hz. 1MIN.





MECHANICAL:

- 1.DURRABILITY :750 CYCLES MIN.
- 2.PCB RETENTION PRE-SOLDER :1 LB MIN.

ENVIRONMENTAL:

- 1. STORAGE : -40°C~+85°C
- 2. OPERATION : 0°C TO 70°C.

PART NUMBER:

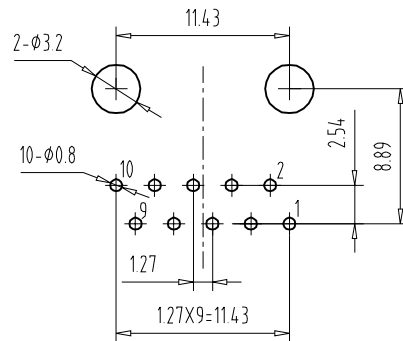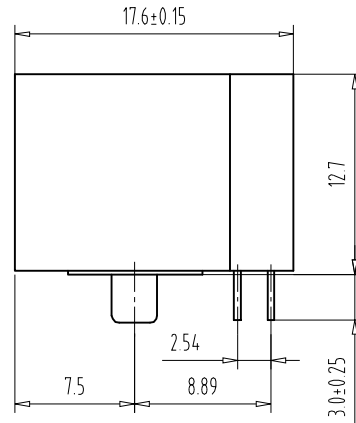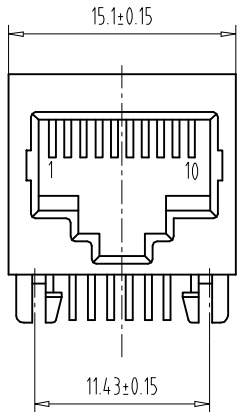

PC Board Layout  
Component Side Shown

TOLERANCES EXCEPT AS NOTED MM .1 ± 0.15 .01 ± 0.075 .001 ± 0.025 ANGLES ± 0.5 THRO ANGLE PROJECTION	DFTD: SHB	DATE: 2007.05.03	<h1 style="margin: 0;">Coorle Technology</h1>	
	CHKD: LANBO	DATE: 2007.05.03		
	MATERIAL :	QTY :	<b>TITLE</b> 56 1X1 SIDE ENTRY JACK 10P10C	
	FINISH :	SCALE :		
DRAWING NO. TES6A1001		SIZE: A3	REV: 0	SHEET X OF Y
/PART NO.		DO NOT SCALE DRAWING		