
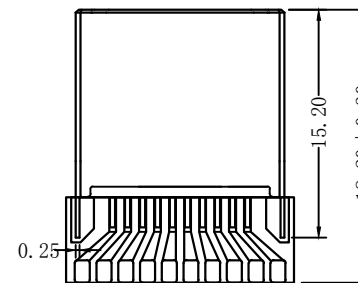
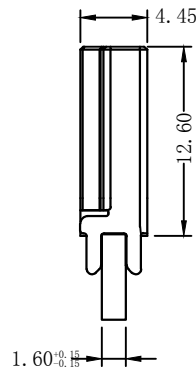
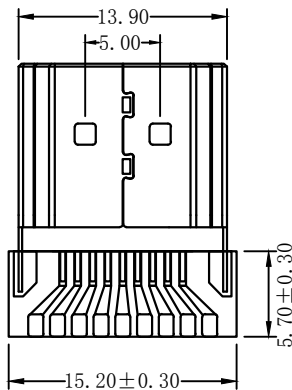


RoHS Compliant


REV.	ZONE	DESCRIPTION	DESIGN	DATE
A		初版发行	Jack	2010.06.18



NOTES:

1. 插入力: 4.5KGF MAXMUM.
2. 拔出力: 1.0KGF MINIMUM;4.0KGF MAXMUM.
3. 耐久性: 10000 CYCLES MIN.
4. 工作温度: -20 TO +85°C
5. 外观不得有缩水、缺胶、毛边、变形等不良.
6. 材质: 外壳: SPCC OR H65, 端子: C5191, 塑胶主体: LCP UL-94V0.
7. 电镀: 外壳镀镍80-120U" 镀金G/F, 端子镀半金锡 接触点镀金G/F.
8. 盐雾: 24H.
9. 所用材质均符合ROHS要求.

Unless otherwise specified tolerances are		DONGGUAN CITY COORLE TECHNOLOGY CO., LTD			
X.X	±0.25	DRAW NO.	CL-10-0028	DATE	DRAW NAME:
X.XX	±0.20	DWN	Jack	10.06.18	HDMI A TYPE 公头带PCB板
X.XXX	±0.15	CHK			P/N :
X*	±2.0*	APVD			
X.X*	±1.0*				



Third Angle Project

FINISH	UNIT	SCALE	WEIGHT	REV	SHEET
MATERIAL	mm	1:1		A	1 OF 1