







变更 CHANGE			
版本 EDITI	变更内容 MODIFICATION	变更日期 UPDATE DATE	签名 SIGNATURE

RoHS COMPLIANT



FEATURES:

- 1 Electrical Test:
  - A. Safety Voltage/Current Rating 150V ac, at 1.5A.
  - B. Dielectric with standing 1000V/DC/min, <0.5A.
  - C. Insulation Resistance: >500MΩ, 1000V./min
  - D. Contact Resistance: <20MΩ
- 2 Mechanical:
  - A. Cable-to-Plug tensile strength-20LBs (89N) min.
  - B. Durability: 750 mating cycles.
- 3 Operation Temperature: -40°C ~ +85°C.
- 4. Environmental compliance
  - A. the products are compliant with the RoHS, and REACH ETC.
- 5. Safety standards: UL E239590

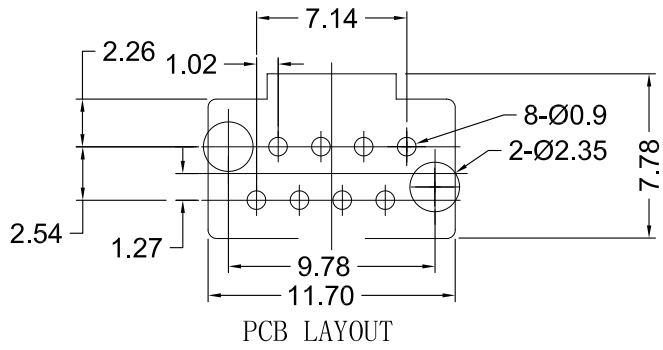

# Coorle Technology

品名规格 DESCRIPTION	PCB水晶头				页次 SHEET	1/1
产品编号 PRODUCT NO	单位 UNIT	mm	比例 SCALE	1:1	版本 EDITI	A/0
DIMENSION IN mm(Inch) TOLERANCE UNLESS OTHERWISE SPECIFIED x. x ±0.2 x. xx ±0.1 x. xxx ±0.05	第三视角法 THIRD ANGLE PROJECTION		制图 DRAWN	日期 DATE	2018. 04. 17	
			核对 CHECK	日期 DATE	2018. 04. 17	
			批准 APPRO	日期 DATE	2018. 04. 17	