


REV.	ECN. NO.	MODIFICATION	NAME	DATA

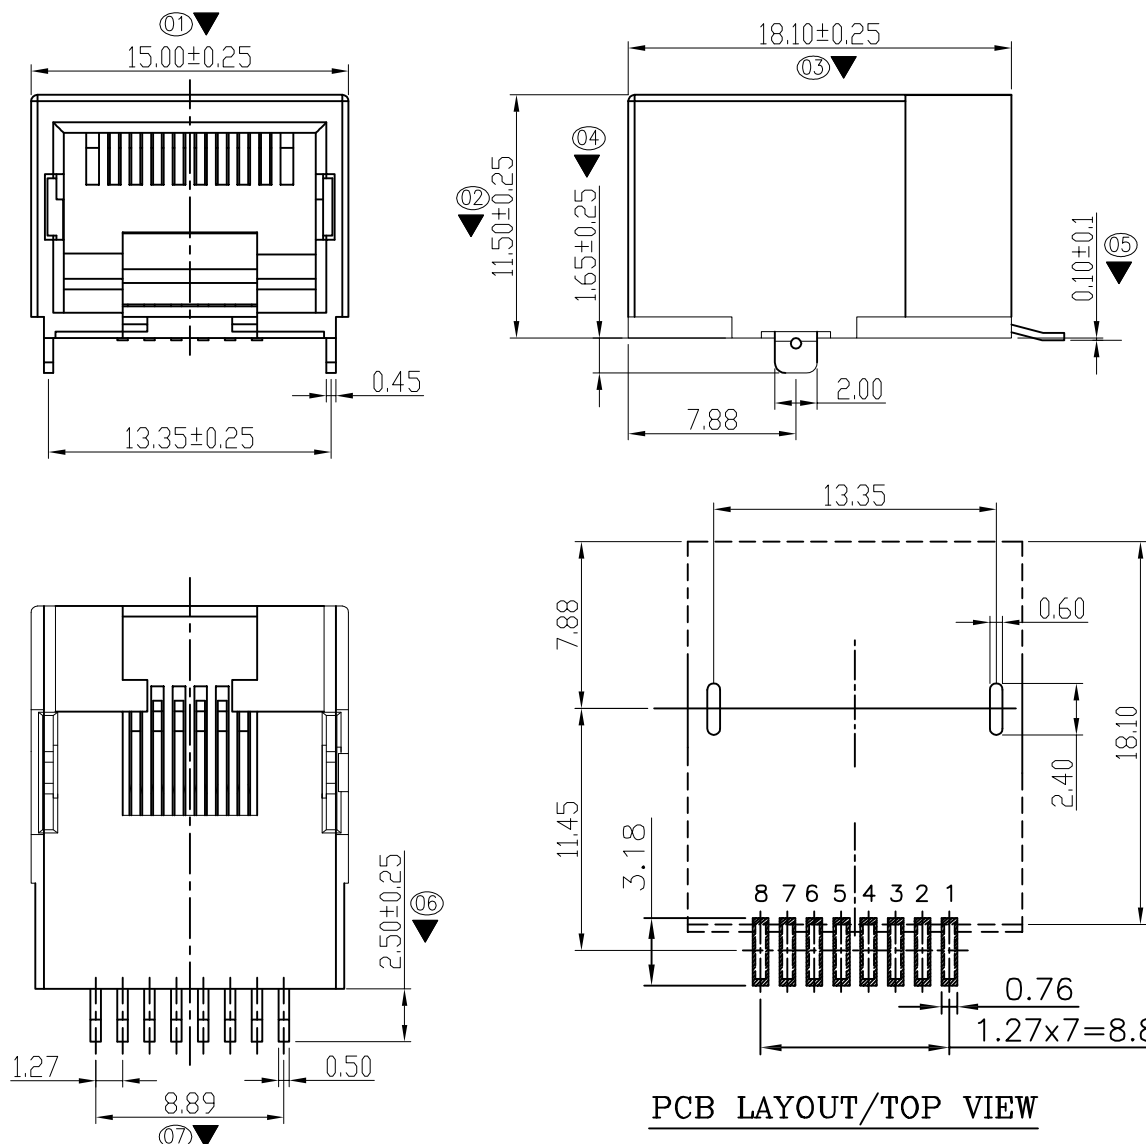

ELECTRICAL:

- VOLTAGE RATING: 125 VAC RMS
- CURRENT RATING: 1.5 AMP
- CONTACT RESISTANCE: 40mΩ MAX.
- INSULATION RESISTANCE: 1000MΩMIN. AT 500V DC.
- DIELECTRIC STRENGTH: 1000 VAC 50Hz 1MINUTE

MECHANICAL:

- HOUSING MATERIAL: THERMOPLASTIC, UL94V-0 RATED, COLOR BLACK.
- CONTACT MATERIAL: PHOSPHOR BRONZE C5191-H T=0.30MM
- PLATING: GOLD PLATING OVER NICKEL IN CONTACT. TIN PLATING OVER NICKEL IN SOLDER AREA.
- OPERATING LIFE: 750 CYCLES MIN.

ENVIRONMENTAL:

- STORAGE: - 40°C TO + 85°C
- OPERATION: - 40°C TO + 70°C

标有“◎▼”号为重点管控及首件检测尺寸。

PCB LAYOUT/TOP VIEW

DETAILED LISTS	MM (INCH)		绘图: (Designed)	YYting	<h1>Coorle Technology</h1>			
	公差: TOLERANCES		审核: (Checked)	Jockey				
	MM	MM	批准: (Approved)	ZLW	RJ	RJ45 18.1 SMT 全塑 带直脚 镀金GF		
	.0 ± 0.38	±	日期: (Date)	2023. 04. 06	类别CATEGORY:	成品图	版本 REV.	A. 0
	.00 ± 0.25	±	比例: (SCALE)	1:1	料号 PART NO:	单位(UNIT): MM		共(SHEET) 1 页 第(OF) 1 页
.000 ± 0.15	±	第三角视图						