


4	CATEGORY	DESCRIPTION	P/N #
	CONNECTOR	RJ45 180度SMT全塑前插后贴	RJ45-88GF-L003

1	REV.	ECN NO	DESCRIPTION	REVISED	DATE
	A01		新增图面	XSY	2015.09.15

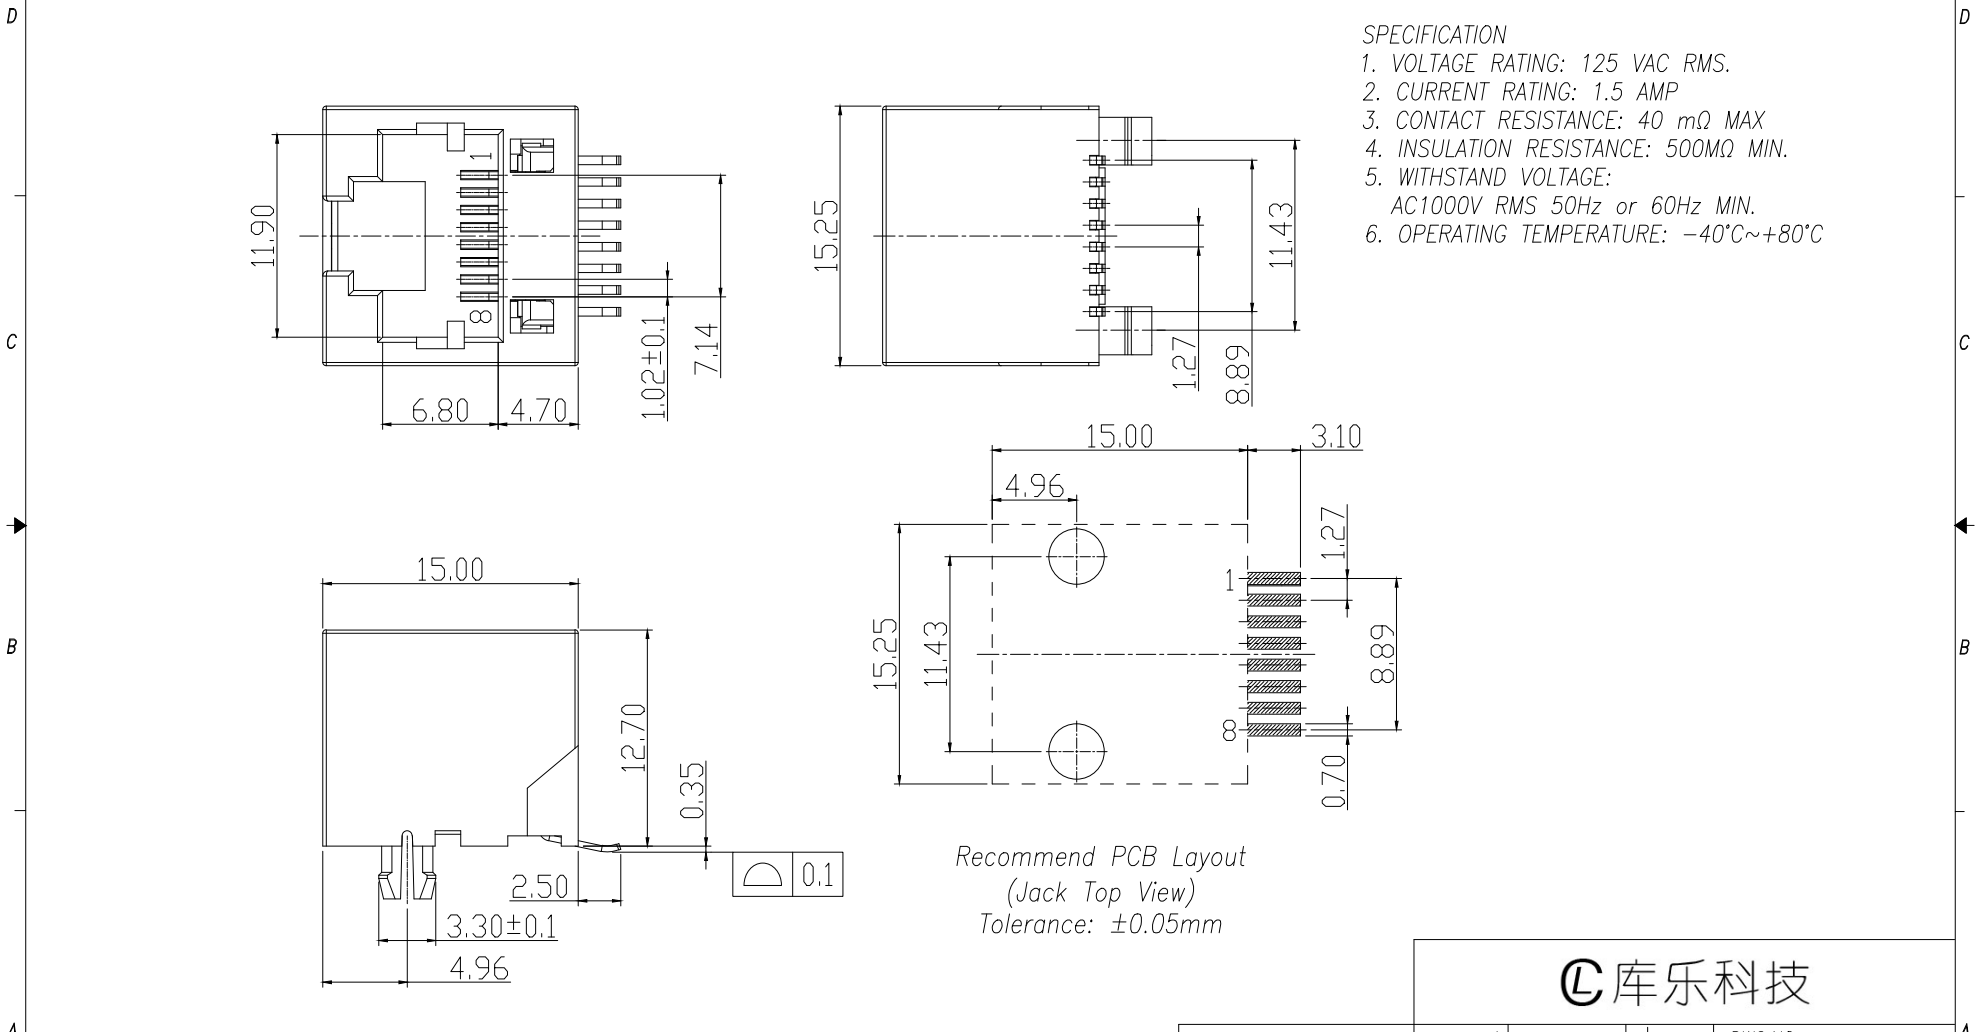

SPECIFICATION

- VOLTAGE RATING: 125 VAC RMS.
- CURRENT RATING: 1.5 AMP
- CONTACT RESISTANCE: 40 mΩ MAX
- INSULATION RESISTANCE: 500MΩ MIN.
- WITHSTAND VOLTAGE:
AC1000V RMS 50Hz or 60Hz MIN.
- OPERATING TEMPERATURE: -40°C~+80°C

Recommend PCB Layout
(Jack Top View)
Tolerance: ±0.05mm

库乐科技

c	TERMINAL	8	PHOSPHOR BRONZE T=0.35mm	Au/Tin PALTING	
b	INSERT	1	PA9T UL94V-0	BLACK	
a	HOUSING	1	PA9T UL94V-0	BLACK	
NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR	Remark

UNLESS OTHERWISE SPECIFIED TOLERANCES		SCALE: 1/1	UNIT: mm	DWG.NO:	
		SIZE: A3	PAGE: 1 OF 1	REV: A01	
DECIMALS:	ANGLES:	APPROVED BY		CHECKED BY	PREPARED BY
X : ±0.5	X : ±2°	DICK		XSY	XSY
X.X : ±0.3	X.X : ±1°	CUSTOMER COPY			
X.XX : ±0.2					